

RM1 - ES80/100V



Shock Proof

Ensuring safety for all users.



Super Enamel Tank

Ultra-strong durability and anti-corrosion performance.



310S+Mo Heating Element

High anti-corrosion Mo alloy coating, 4 times that of the common heating element.




Ergonomic Dial Control

Ergonomically designed for effortless operation.



MAX Button

Control Panel

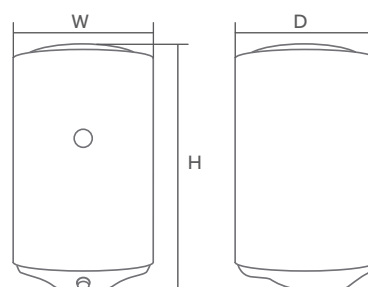

Model	ES80V-RM1	ES100V-RM1
Installation type	Vertical + Horizontal	Vertical + Horizontal
Control method	Mechanical	Mechanical
Capacity (L)	80	100
Material of inner tank	Enamel stainless steel	Enamel stainless steel
Material of outer body	Painted SPCC	Painted SPCC
Material of heating element	310S+Mo	310S+Mo
Rated voltage (V)/frequency (Hz)	220-240/50	220-240/50
Rated power (W)	1500	1500
Rated temperature (°C)	75	75
Rated pressure (bar)	7	7
Water-proof grade	IPX4	IPX4
Product dimensions W/D/H (mm)	452*468*768	452*468*913
Packing dimensions W/D/H (mm)	530*530*828	530*530*973
Net weight (kg)	23	26
Gross weight (kg)	26	31
Energy class	C	C
Load.40HQ	626	454